arXiv:1202.2351v1 [physics.class-ph] 10 Feb 2012

Self-attraction effect and correction on three absolute gravimeters

E. Biolcati[1], S. Svitlov[2], A. Germak[1]

[1]Istituto Nazionale di Ricerca Metrologica INRIM, Turin, Italy
[2]Institute of Optics, Information and Photonics, University of Erlangen-Nuremberg, Erlangen, Germany

E-mail: e.biolcati@inrim.it

Abstract. The perturbations of the gravitational field due to the mass distribution of an absolute gravimeter have been studied. The so called Self Attraction Effect (SAE) is crucial for the measurement accuracy, especially for the International Comparisons, and for the uncertainty budget evaluation. Three instruments have been analysed: MPG-2, FG5-238 and IMPG-02. The SAE has been calculated using a numerical method based on FEM simulation. The observed effect has been treated as an additional vertical gravity gradient. The correction (SAC) to be applied to the computed g value has been associated with the specific height level, where the measurement result is typically reported. The magnitude of the obtained corrections is of order 1×10^{-8} m/s^2.

Keywords: Absolute gravimeter, self attraction, uncertainty

1. Introduction

Modern transportable Absolute Gravimeters (AGs) measure the local value of the free-fall acceleration g by reconstructing the trajectory of a falling object in vacuum. The mass of the parts constituting each AG apparatus (such as laser interferometer, vibration isolation system, vacuum chamber, etc.) are sources of an additional gravitational field, which can systematically perturb the motion of the flying object. The so called Self Attraction Effect (SAE) could be non negligible because the actual absolute g values are estimated with uncertainties of the order of few μGal (1 μGal = 10^8 ms^{-2}) and masses of few kilograms placed at few centimeters from the test body can generate fluctuations of the gravitational field of several microgals.

To calculate the SAE, a detailed study on three different gravimeters MPG-2 [1], FG5-238 [2] and IMGC-02 [3] has been performed, using a Finite Element Method (FEM) simulation to calculate the contributions of each part of the gravimeters. Then the Self-Attraction Correction (SAC) to be applied to the g value has been calculated for each AG, taking into account the peculiar model used to compute the free-fall acceleration from the reconstructed free-fall trajectory.

The knowledge of the SAE and the relative SAC is crucial for each measurement carried out by the AGs, because it can improve the accuracy as well its uncertainty. It becomes very important when the measurements are used to calculate the Key Comparison Reference Value (not physically known) during the dedicated International Comparisons.

In the following section a brief description of the three instruments is presented. After that, the adopted method to evaluate the SAE and the results obtained for the AGs are illustrated. In the last part, the SAC values are calculated separately for the three AGs.

2. Absolute gravimeters

Three different transportable AGs have been studied:

- the MPG-2, designed in Germany by the Max Planck Institute for the Science of Light, prototype instrument;
- the FG5-238, actually developed and commercialised by the U.S.A. Micro-g LaCoste Incorporation (the results coming from this AG can be considered for to the other instruments of the same series, i.e. FG5-2xx);
- the IMGC-02, developed in Italy by the Istituto Nazionale di Ricerca Metrologica (INRIM), prototype instrument.

For each of them, the measurement of the g value is obtained by the reconstruction of the trajectory of a corner-cube prism (or a hollow retroreflector) which moves vertically in vacuum. The IMGC-02 takes into account for both the rise and fall motions of the flying object, while the other two instruments measure the acceleration during the free-fall motion only.

Automated systems are employed to centre, launch and receive the object event by event with nominal rates of about $0.02 \div 0.05$ Hz during data taking sessions of several hours. An interferometric system is implemented to measure time and distance coordinates of the trajectory using a visible laser beam. The interferometer measures the distance between the corner-cube flying prism and a second one mounted on the quasi-inertial mass of a vibration isolation system used to protect it from ground vibrations. A detailed description of the tree AGs can be found in [1, 2, 3].

The distribution of the heaviest and nearest parts of each instrument and the path of the flying object have been considered to characterise the perturbation gravitational field $\Gamma(Z)$. Each gravimeter can be essentially divided in three main parts:

- *read-out electronic case:* it can be easily moved farther away (up to about 1 m) from flying object trajectory, so the SAE from this source is negligible;
- *measuring system:* supporting tripod, seismometer or super-spring system with its support, several detectors and the interferometer, in this case the SAE is mainly due to the masses of each single parts;
- *launch system:* the vacuum chamber with the dropping mechanism and its basis whith all the accessories, in this case the effect must to be analysed in details because those objects are very close to the flying object trajectory.

The geometry of the last two parts have been drawn using the COMSOL® 3D module and it is shown for the three AGs in figure 1. Screws, cables, holes are not simulated because their influence is negligible for the SAE.

3. Self-Attraction Effect

To evaluate the gravitational field perturbation of each single part of an AG, an accurate knowledge of the geometry and the mass distribution of the source is needed. Due to the complexity of the single parts (edges, different materials, non regular shape), a FEM simulation has been preferred instead of a mathematical modelling.

3.1. Numerical method

The COMSOL® software [4] has been adopted. A package devoted to gravitational effects is not implemented in the original software. The electrostatic module is then used, exploiting the analogy between gravitational and electrical interactions already used for this or similar purpose in [5, 6]. Defining a conversion parameter as

$$K = -4\,\pi\,G\,\varepsilon_0 \tag{1}$$

with G the universal gravitational constant and ε_0 the electric permittivity constant in the vacuum, the module of the gravitational field is given by

$$\Gamma(r) = \frac{G\,\rho_m\,V}{r^2} = \frac{K\,\rho_e\,V}{r^2} \tag{2}$$

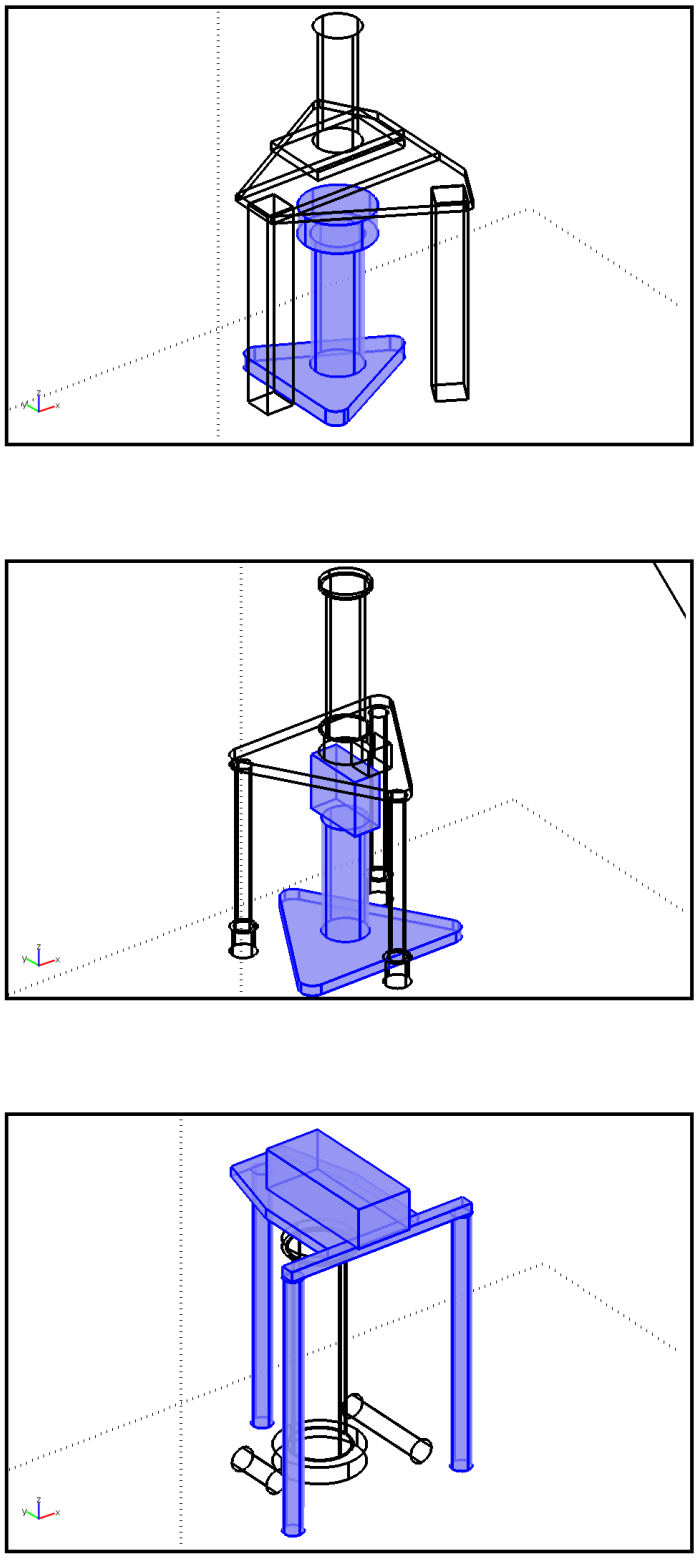


Figure 1. Geometry of the MPG-2 (top), FG5-238 (middle) and IMGC-02 (bottom) absolute gravimeters, drawn using the COMSOL® 3D module. The two main systems are distinguishable: measuring (coloured) and launch one (transparent). Only parts interesting for the gravitational effect analysis have been simulated.

where ρ_e and ρ_m are respectively the electrostatic and mass density, V the volume of the part.

The component along the direction orthogonal to the floor on which a gravimeter is located (called Z coordinate) of the gravitational field (Γ_Z) has been considered to evaluate possible effects on the measurement of the g value. The other two components along the X and Y axes can influence the flying object trajectory introducing rotation or shift components. This effort has not been treated in this study for two principal motivations: *i*) the effects are related to the mechanical features of each AG, as the corner-cube centring or the asymmetry in the launch system; *ii*) the perturbations are expected to be negligible with a respect to the one along the Z coordinate.

For these reasons, the origin of the reference frame has been set on the ground floor, with the Z axis directed upwards and crossing the centre of the flying object. Modern AGs measure the g value at the height values between about 0.4 and 1.3 m, so the Γ_Z value is calculated along a straight line from $O(0, 0, 0)$ to $A(0, 0, 1.5\text{ m})$.

The FEM simulation consists of three main steps: geometry draw, mesh implementation and equations solution.

In the first step, the parts of the AG are drawn and their mass values implemented. Two different approaches can be used for each part:

- if its shape is regular (such as cylinder or parallelepiped) and the mass distribution is almost homogeneous, the mass density and volume real values are introduced in the software;
- in case of complex shapes, e.g. different parts with screws and holes, or inhomogeneous mass distribution, as a seismometer, it is approximated to a regular solid with equivalent volume and mass is simulated.

In this study, seismometers, frames, launch chambers, vacuum pumps have been simulated using the second approach, the other components have been simulated with the real shape.

The parts so defined are then embedded in a empty volume where the field can be propagated. The shape is spherical with the radius value about one order of magnitude larger than the sizes of the AGs, in order to have edges far from the centre of the instrument, so as to minimise the boundary effects [6].

In the second step, the mesh geometry and size are implemented. Such parameters must be tuned to have the maximum resolution of the gravitational field in the range of interest.

To validate the FEM simulation parameters, i.e. the mesh size and the boundary sphere, a study of two simple objects has been preliminary performed. A steel sphere centred at $O(0, 0, 0)$ with radius $r_1 = 0.12$ m has been located together with an aluminium sphere centred at $P(0, 0, 0.6\text{ m})$ and $r_2 = 0.1$ m. The radius of the boundary sphere is $r_0 = 3$ m. In figure 2 the relative difference between the values of the gravitational field (only component along Z coordinate at X=0 and Y=0) obtained from the theoretical model and the FEM simulation is plotted. No increment of the residuals

can be observed far from the masses ($Z \approx A$), indicating that no effect due to the boundary conditions is present. The fluctuations are caused by the mesh discretization. The residual values are distributed around zero with the root mean square below 2%, as shown in the inset plot.

In the last step of the method, the equations of the problem are numerically solved. In this case the only parameters can be set are referred to the CPU consumption for the algorithm, with modifications of the results below the 0.01%.

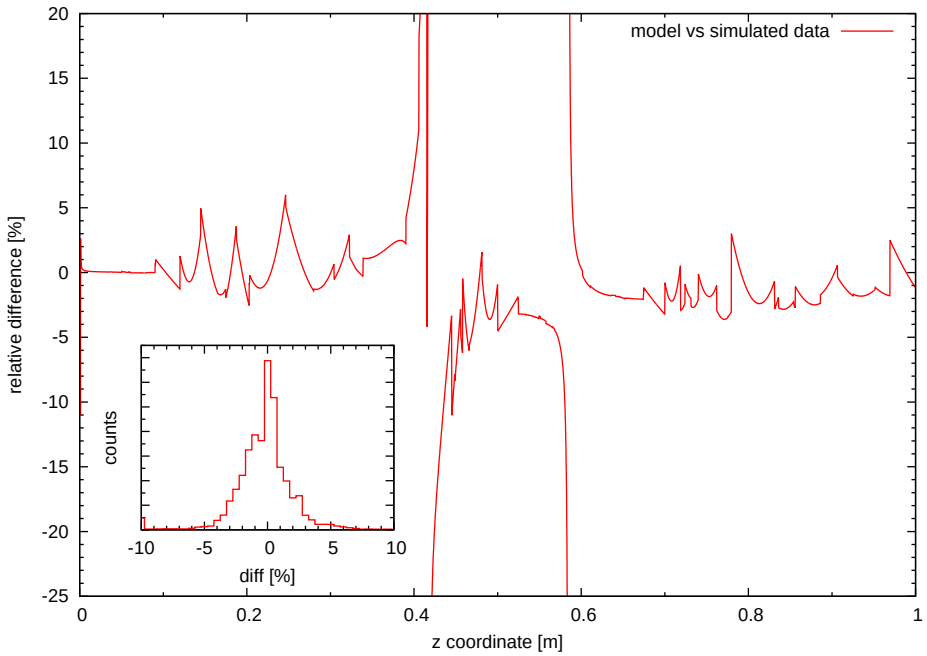


Figure 2. Comparison between gravitational field values (component on Z coordinate, X=Y=0) obtained by using the theoretical formulas and the FEM simulation with a so called *finer mesh*.

The main contribution to the uncertainty of the simulation are due to the approximations made in the first step. In order to estimate it, several simulations of different complex parts (e.g. seismometer, launch chamber) have been performed varying the ratio between the sub-part masses‡. Using such approach, the standard uncertainty of the SAE computed using the FEM method has been estimated to be $u_{\mathrm{SAE}} = 0.1\ \mu$Gal.

3.2. SAE results

The method described above has been applied to the three AGs with equal FEM parameters. A mesh called *finer*, which is automatically adapted to the edges and the contact points, has been implemented. The gravitational field has been calculated

‡ In other words, an object of known mass is constituted by sub-parts of unknown mass. Simulations with a ratio between the sub-parts set to 1/3, 1/3, 1/3 is performed. Then it is repeated with different ratio values as 1/8, 3/8, 1/2 etc.

in the whole boundary sphere ($r_0 = 3$ m). The component Z of the gravitational field along the line centred with the flying object trajectory has been extracted for the global simulation. The contributions due to the measuring and the launch systems have been separately estimated.

In figure 3 the global and the single results are shown for the three AGs.

For the MPG-2, the largest values are located at $Z \simeq 0.8$ m and $Z \simeq 1.2$ m, due to the presence of the launch chamber basis. In the range of the free-falling path, an average SAE of about 1.5 μGal is estimated and the behaviour appears monotone.

Also for the FG5-238 the main effect can be observed at $Z \simeq 0.8$ m, but in this case the free-fall range is larger than the previous instrument ($\simeq 0.2$ m). The SAE in such range is below 2 μGal with an average value of 1.3 μGal.

For the IMGC-02, two bumps can be observed at $Z \simeq 0$ and $Z \simeq 0.9$, due to the presence of the launch chamber basis and the seismometer with its support respectively. In the range of rise and fall path, the mean influence of the SAE is below 0.2 μGal (absolute value).

4. Self-Attraction Correction

The computed above SAE is nearly linear in the measurement range of every AG (figure 3). Such linear (over height) gravity variation corresponds to the constant self-attraction gravity gradient γ_{SAE} with a some constant offset $\ddot{z}_{\mathrm{SAE}}$ at a chosen origin. The superposition property of gravitational fields from several sources allows to treat the SAE in an AG similar and in addition to the conventional vertical gradient γ of the Earth gravity field. Then the observed height-varied free-fall acceleration is approximately given by

$$g(z) = (g_0 + \gamma z) + (\ddot{z}_{\mathrm{SAE}} + \gamma_{\mathrm{SAE}} z). \tag{3}$$

The z-axis in (3) is directed toward the centre of Earth (opposite to the Z axis in the previous figures), and the signs of g_0 and γ are chosen to be positive downwards (a freely-falling object accelerates downwards, magnitude of the acceleration increases towards the Earth surface). This section considers methods to convert the computed SAE into the SAC for the particular AG.

4.1. Effect of the gravity gradient γ

The linear free-fall motion model for the unperturbed free-fall in a homogeneous gravity field reads [8]

$$z(t) = z_0 + v_0\, t + \frac{1}{2}\, g_0\, t^2, \tag{4}$$

where z_0 and v_0 are the initial position and velocity at $t = 0$, and g_0 is a value of the free-fall acceleration at the level $z = 0$. When the registered free-fall motion trajectory

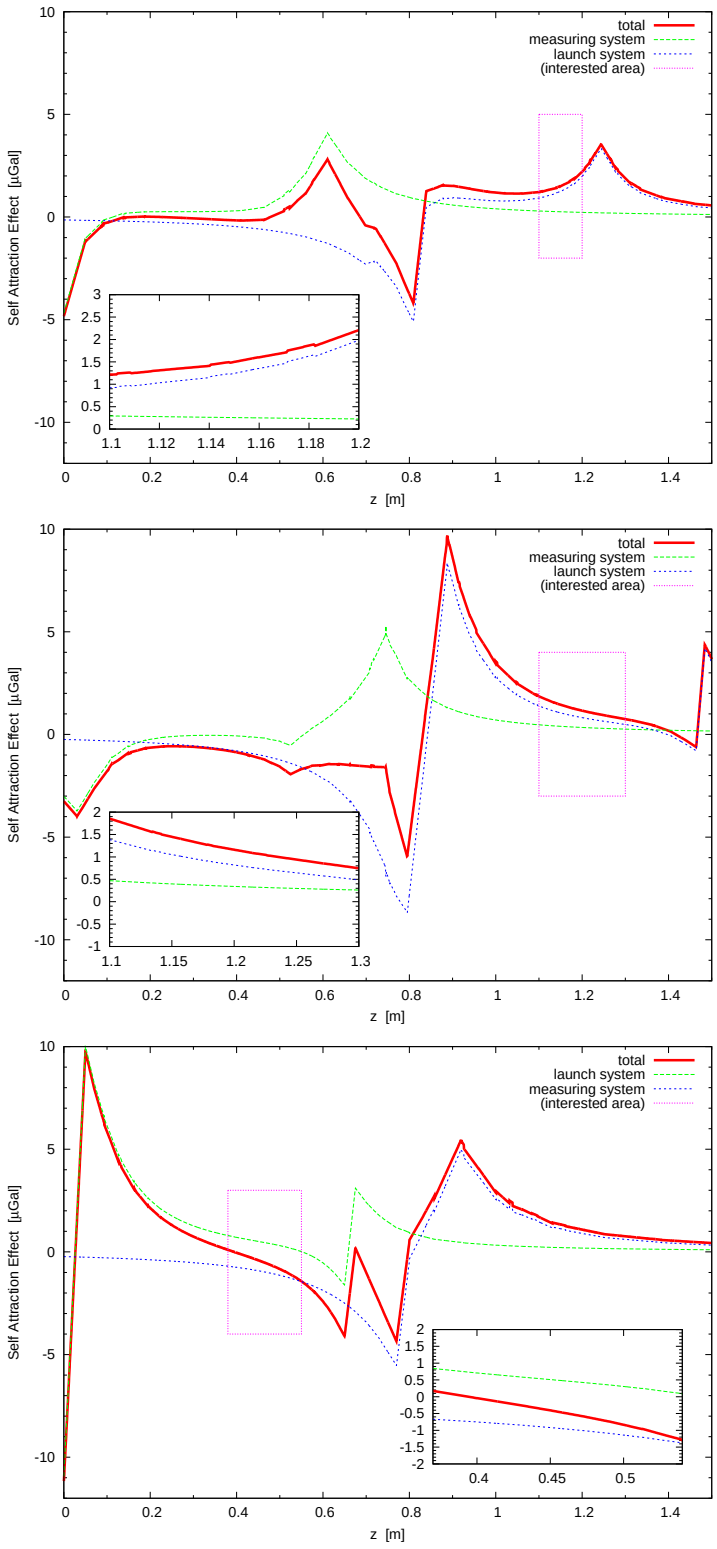


Figure 3. Result of the FEM simulation for the absolute gravimeter MPG-2 (top), FG5-238 (middle) and IMGC-02 (bottom). Self-Attraction Effect versus Z coordinate. Total and single contributes of launch and measuring systems are shown. The approximate operating range of every instrument is identified by the rectangular in the figure and it is enlarged in the inset plot.

$z_i(t_i)$ is constructed from more than three time-distance coordinate pairs, the standard least-squares estimate on g_0 in a model (4) is given by the functional [9]

$$g = G(t_i, z_i) = 2 \begin{vmatrix} N & \Sigma t_i & \Sigma z_i \\ \Sigma t_i & \Sigma t_i^2 & \Sigma t_i z_i \\ \Sigma t_i^2 & \Sigma t_i^3 & \Sigma t_i^2 z_i \end{vmatrix} : \begin{vmatrix} N & \Sigma t_i & \Sigma t_i^2 \\ \Sigma t_i & \Sigma t_i^2 & \Sigma t_i^3 \\ \Sigma t_i^2 & \Sigma t_i^3 & \Sigma t_i^4 \end{vmatrix}, \tag{5}$$

where sums comprise all N time-distance coordinates t_i and z_i.

In a case of the non-homogeneous gravity field characterized by the constant gravity gradient γ, the approximated free-fall motion model reads

$$z(t) = z_0 \left(1 + \gamma \frac{t^2}{2}\right) + v_0 \left(t + \gamma \frac{t^3}{6}\right) + g_0 \left(\frac{t^2}{2} + \gamma \frac{t^4}{24}\right). \tag{6}$$

The least-squares approximation of the model (4) instead of (6) gives a biased estimate g, which equals to an instantaneous gravity value at the specific point below the level $z = 0$, called the effective measurement height h_{eff} [9, 10, 11, 12]:

$$g = g_0 + \gamma\, h_{\text{eff}}. \tag{7}$$

The remarkable property of the h_{eff} is that the solution g (equation (5)) at this point does not depend on the constant gravity gradient and its uncertainty. It can be found as [9, 12]

$$h_{\text{eff}} = z_0 + v_0 \frac{G(t_i, t_i^3)}{6} + g \frac{G(t_i, t_i^4)}{24}, \tag{8}$$

where the parameters estimated z_0, v_0 and g are obtained from the least-squares approximation of the model (4), and the functional (5) is modified by replacing z_i with t_i^3 at v_0 or with t_i^4 at g. An asymptotic ($N \gg 1$) expressions§ for the h_{eff} can be found in [9, 10, 11].

When the fitted model (6) contains the gravity gradient γ as an external known quantity‖, the obtained least-squares estimate g_0 is automatically translated from the h_{eff} to the level $z = 0$ as

$$g_0 = g - \gamma\, h_{\text{eff}}. \tag{9}$$

Since the considered absolute gravimeters employ different models, it results in different methods of computing the SAC.

4.2. SAC for MPG-2

The MPG-2 is a multiple-level free-fall absolute gravimeter with the linear free-fall motion model (4) [1], therefore, the measurement result is reported at the h_{eff}. A straight-line approximation of the SAE (figure 4, left) is given by

$$\ddot{z}(z) = \ddot{z}_{\text{SAE}} + \gamma_{\text{SAE}} (z - h_{\text{eff}}). \tag{10}$$

§ The effective measurement height is usually counted from the start (z_i) of the measurement distance interval H [10, 12]. To make it compatible with the h_{eff} (8) used in this report, one should add a distance interval from the level $z = 0$ (e.g., optical centre of the resting retro-reflector) to z_i.

‖ When the model (6) does not contain the gravity gradient at the term z_0 [2], the reference level corresponds to $z = z_0$ instead of $z = 0$.

The parameters $\ddot{z}_{\mathrm{SAE}}$ (intersect) and γ_{SAE} (slope) can be found by the least-squares approximation of the computed SAE with the associated standard deviations $u_{\ddot{z}_{\mathrm{SAE}}}$ and $u_{\gamma_{\mathrm{SAE}}}$. A range of approximation should match the actual measurement distance interval $H = (z_f - z_i)$, used to compute (5).

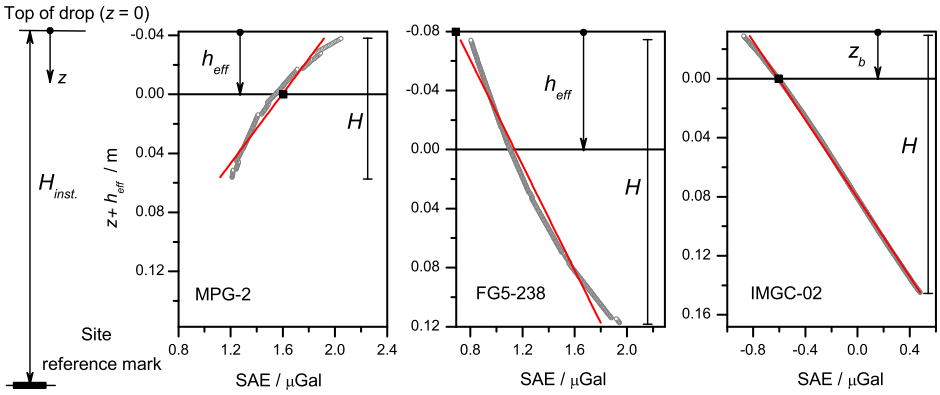


Figure 4. Self-attraction effect over a measurement range H of the MPG-2, FG5-238 and IMGC-02. Open grey dots for the SAE computed in previous section; red lines for the approximations by the first order polynomial. Solid squares indicate a value of the SAC (opposite sign) at the corresponding reference height. Computed corrections are shown in table 1

According to (3) and (7), the measurement result at the h_{eff} is given by

$$g = g_0 + \ddot{z}_{\mathrm{SAE}} + (\gamma + \gamma_{\mathrm{SAE}})\, h_{\mathrm{eff}}. \tag{11}$$

Since this estimate does not depend on the constant gravity gradient $\gamma_{\mathrm{tot}} = \gamma + \gamma_{\mathrm{SAE}}$, the correction is given by

$$\Delta g = -\ddot{z}_{\mathrm{SAE}}, \tag{12}$$

with a standard uncertainty of

$$u_{\Delta g} = u_{\ddot{z}_{SAE}}. \tag{13}$$

The the computed SAC (12) is of $-(1.6 \pm 0.004)$ μGal. It should be added to the result reported at the level of $H_{\mathrm{inst}} - h_{\mathrm{eff}}$.

4.3. SAC for FG5-238

The FG5-238 is a multiple-level free-fall absolute gravimeter with the linear free-fall motion model (6) (without the gradient term at z_0) [2], therefore, the measurement result is obtained at the level z_0 (with further reduction of $(-\gamma\, z_0)$ it is usually transferred to the rest position of the falling object, so called "top of drop" [2]). Combining (11) and (9), the measurement result is given by

$$g = g_0 + \ddot{z}_{SAE} + \gamma_{\mathrm{SAE}}\, h_{\mathrm{eff}}. \tag{14}$$

It has to be corrected by

$$\Delta g = -(\ddot{z}_{\mathrm{SAE}} + \gamma_{\mathrm{SAE}}\, h_{\mathrm{eff}}). \tag{15}$$

The standard uncertainty of this correction is given by:

$$u_{\Delta g} = u_{\ddot{z}_{SAE}} + u_{\gamma_{SAE}}\, h_{\text{eff}}. \tag{16}$$

Note that the standard uncertainty (16) under the same conditions is larger compared to the uncertainty (13). This is a particular outcome of a general disadvantage to include a known gravity gradient into a model (6) and to report the measurement result at the top of drop instead of reporting it at the effective measurement height.

If a value of the effective measurement height is not available, the computed SAE can be approximated by the straight line with the origin placed to the start¶ of the measurement interval H. Then similar to (15), a correction can be obtained by extrapolation to the reference level (e.g. top of drop): $\Delta g_{SAE} = -(0.7 \pm 0.004)$ μGal. It should be added to the result reported at the instrumental reference height H_{inst} (figure 4, centre). Alternatively, the SAC at the level of $H_{\text{inst}} - h_{\text{eff}}$ is given by $-(1.1 \pm 0.003)$ μGal.

4.4. SAC for IMGC-02

The IMGC-02 is a multiple-level rise-and-fall absolute gravimeter with the non-linear model, which contains the gravity gradient γ as an unknown parameter [13]:

$$z(t) = z_0 + g_a \left[\frac{(t-t_a)^2}{2} - \varphi \frac{(t-t_a)^3}{6} + \gamma \frac{(t-t_a)^4}{24} \right], \tag{17}$$

where t_a is the time at the apex of the trajectory parabola and φ the friction coefficient of the residual air in the launch chamber.

Since this model is non-linear in the parameters g_a and γ, the superposition principle for the perturbed parameter estimates is not valid, and *a posteriori* correction for a time (or height) varying perturbation is not applicable in a strict sense. Instead, a straightforward approach to modify the registered time-distance coordinates before the non-linear least-squares adjustment might be used by taking into account *a priori* computed SAE. However, obtained results might not be extendible to other measurement conditions or changed parameters of an instrument. Then such a modification is necessary at every new measurement session.

In the IMGC-02 a measurement result is usually reported at the best measurement height z_b below the apex of the parabola [13]:

$$g_b = g_a + \gamma\, z_b, \tag{18}$$

where g_a and γ are directly estimated from the trajectory data using the model (17), and z_b is computed from the elements of the variance-covariance matrix and also depends on a quantity of the upper portion of the trajectory removed from the least-squares fit. With typical parameters of the IMGC-02 the best measurement height is close the

¶ Shifting an origin to the border of the range of approximation gives rise to the standard error of the extrapolated parameter, which is, however, negligibly small for the particular curvature of the SAE.

Table 1. The self-attraction corrections for three absolute gravimeters.

	MPG-2	FG5-238	IMGC-02
refer. height above floor [m]	1.154	1.292	0.475
measur. range $H = (z_f - z_i)$ [m]	0.094	0.192	2×0.174
effective height h_{eff}[m]	0.043	0.080	0.029
start velocity $v(z_i)$ [m/s]	0.31	0.35	1.84
SAC (linear approx.) [μGal]	–1.6 ± 0.1	–0.7 ± 0.1	+0.6 ± 0.1
SAC (mean value) [μGal]	–1.5 ± 0.3	–1.3 ± 0.3	+0.2 ± 0.4

effective measurement height $h_{\text{eff}} = H/6$ derived for the rise-and-fall AG with a linear free-fall motion model and without removing the upper portion of the trajectory [9]:

$$z_b \simeq \frac{H}{5.8} \tag{19}$$

with H being a total distance interval traveled by a falling object twice.

To evaluate a magnitude of the SAE on the measurement result, we assume that at the level z_b the estimate g_b (18) is not correlated with the estimate γ [13]. Then the bias is given only by the constant term of the SAE, derived from the least-squares adjustment of the model (10) with an origin chosen at the level z_b. Consequently, the SAC can be evaluated by (12) with the standard uncertainty (13). The SAC is then computed as $+(0.6 \pm 0.0001)$ μGal. It should be added to the result reported at the level of $H_{\text{inst}} - z_b$ (figure 4, right).

Table 1 contains the computed corrections for the considered AGs. The standard uncertainty from the least-squares approximation is upgraded to 0.1 μGal, as derived from the FEM simulation. In addition, a crude mean-value estimate on the SAC is also considered (corresponding to the average SAE values with an opposite sign). It might be seen, that this simple estimate is a satisfactory measure of the SAC in a case when the known gravity gradient is not included in the free-fall motion model, or when the measurement result is reported at the effective (or the best) measurement height.

Reporting the g measurement result at the top of drop should not be associated with the averaged SAE. A proper SAC requires further extrapolation outside the actual measurement range H (figure 4, middle).

5. Conclusions

Three Absolute Gravimeters (AGs) have been studied in order to calculate the Self-Attraction Effect (SAE) due to the masses of their single parts, using a FEM simulation method. The correction (SAC) to be applied to the final measure of g has then been calculated for each AG. It should be pointed out that besides the observed SAE, the SAC generally depends on the method of a free-fall acceleration measurement, adopted free-fall motion model, number and method of data location and portion of the reconstructed free-fall motion trajectory used in the least-squares adjustment.

The MPG-2 presents the largest SAE with an average value of $(+1.5 \pm 0.1)$ μGal and a SAC can be applied to the reported g value. For the FG5-238 an averaged SAE of about $(+1.3 \pm 0.1)$ μGal has been found, consistent with the results estimated by [7]. Also in this case a SAC of (-0.7 ± 0.1) μGal can be applied to the measurement result reported at the top of drop. For the IMGC-02 the averaged effect (-0.2 ± 0.1) μGal results to be negligible with a respect to the combined standard uncertainty. However, a *a priori* approach to implement the SAC has been discussed.

Such results can be related to the measurements performed during all the previous and future comparisons, especially the International Comparisons of Absolute Gravimeters (ICAGs). The most recent published results of an ICAG (i.e. 2005 [14]) have been chosen as a reference in the following.

In the case of the MPG-2 (not present at ICAG 2005) the computed SAC exceeds the preliminary declared uncertainty of 0.5 μGal due to this effect. Therefore, in the results and uncertainty budgets of MPG-2, reported at previous comparisons, it is reasonable to replace this contribution of 0.5 μGal with the obtained SAC.

About the IMGC-02, the application of the SAC should not significantly change the g values with a respect to the combined standard uncertainty of about 4.3 μGal, which already included a contribution of 0.3 μGal for SAE [14].

The results found for the FG5-238 can be considered for the other AGs of the same series (i.e. FG5-2xx) which represent the most part of the instruments participating to the comparisons. Usually the g measurements performed using FG5-xxx did not present a SAC and only few participants considered the SAE in the uncertainty budget evaluation. At ICAG 2005 [14], a contribution of 0.1 μGal has been estimated for the FG5-108 and the FG5-213 and it is has been used to calculate the so called *conventional* uncertainty for all the FG5-xxx [15]. Hence, a revision of the values of the previous comparison should be useful, also because the abundance of FG5 instruments strongly influences the Key Comparison Reference Value.

The presented approach to evaluate the SAE and the SAC is applied to three AGs, but it has general validity. For this reason, the whole procedure can be applied to other absolute gravimeters, knowing its the peculiar features as geometry, mass values and fit model.

Acknowledgments

Special thanks to the Filippo Greco and Antonio Pistorio of the Istituto Nazionale Geologia e Vulcanologia (INGV), Sezione di Catania, for the important collaboration in the characterisation of the FG5-238. Contribution of the second author (SS) was supported by the Deutsche Forschungsgemeinschaft (DFG, Germany) under the project SV 86/1-1.

References

[1] Rothleitner Ch, Svitlov S, Merimeche H, Hu H and Wang L J, *Development of new free-fall absolute gravimeters*, Metrologia **46** (2009) 283-297

[2] Niebauer T M, Sasagawa G S, Faller J E, Hilt R and Klopping F, *A new generation of absolute gravimeters*, Metrologia **32** (1995) 159-180

[3] D'Agostino G, Desogus S, Germak A, Origlia C, Quagliotti D, Berrino G, Corrado G, d'Errico V and Ricciardi G, *The new IMGC-02 transportable absolute gravimeter: measurement apparatus and applications in geophysics and volcanology* Ann. Geophys. **51** (2008) 3949

[4] *COMSOL® Multiphysics Modeling and Engineering Simulation Software*, www.comsol.com

[5] D'Agostino G, Germak A, Mazzoleni F, Quagliotti D, Barbato G, *Influence of the mutual gravitational attraction in a set of masses of deadweight machines*, Proceedings of IMEKO XIX World Congress "Fundamental and Applied Metrology" (2009), ISBN: 978-963-88410-0-1

[6] D'Agostino G, Merlet S, Landragin A and Pereira Dos Santos F, *Perturbations of the local gravity field due to mass distribution on precise measuring instruments: a numerical method applied to a cold atom gravimeter*, Metrologia **48** (2011) 299-305

[7] Robertson L, *Treating absolute gravity data as a spacecraft tracking problem*, Metrologia **33** (1996) 545

[8] Torge W, *Gravimetry* (Berlin-New York: Walter de Grueter), (1989)

[9] Nagornyi V D, *A new approach to absolute gravimeter analysis*, Metrologia **32** (1995) 201-208

[10] Niebauer T M, *The effective measurement height of free-fall absolute gravimeters*, Metrologia **26** (1989) 115-118

[11] Timmen L, *Precise definition of the effective measurement height of free-fall absolute gravimeters*, Metrologia **40** (2003) 62-65

[12] Nagornyi V D, *Gravity, Geoid, and Geodynamics*, 2000: IAG Symp. Proc. vol 123, ed M G Sideris (Berlin: Springer) pp 263266

[13] Bich W, DAgostino G, Germak A and Pennecchi F, *Reconstruction of the free-falling body trajectory in a rise-and-fall absolute ballistic gravimeter*, Metrologia **45** (2008) 308-312

[14] Z Jiang *et al.*, *Final report on the Seventh International Comparison of Absolute Gravimeters (ICAG 2005)*, Metrologia **48** (2011) 246

[15] Vitushkin L *et al.*, *Results of the Seventh International Comparison of Absolute Gravimeters ICAG-2005 at the Bureau International des Poids et Mesures*, Svres Proc. IAG Symp. on Gravity, Geoid and Earth Observation 2008 vol 135 pp 4753